
DURACELL®

DL123A

Size: 2/3A

Li/MnO_2

Lithium/Manganese Dioxide Battery

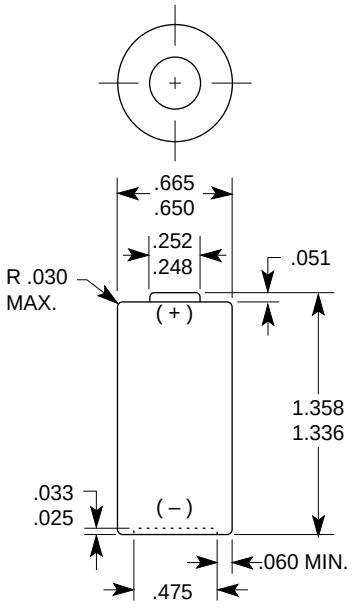

Inches	mm
1.358	34.50
1.336	33.93
.665	16.89
.650	16.51
.475	12.07
.252	6.40
.248	6.30
.060	1.52
.051	1.30
.033	0.84
.030	0.76
.025	0.64


Dimensions are nominal unless otherwise indicated.

SPECIFICATIONS


Nominal Voltage:	3.0 V
Typical Voltage:	3.2 – 3.3 V
Rated Capacity:	1,400 mAh at 100 Ω to 2.0 V at 20°C (68°F)
Average Weight:	0.60 oz. (17.0 g)
Volume:	0.438 $in.^3$ (7.18 cm^3)
Terminals:	Flat, Recessed Negative Terminal
Operating Temp. Range:	-40°C to 60°C (-40°F to 140°F)
NEDA/ANSI:	5018 LC
IEC:	CR17345

Note: Designed for 3-volt user-replaceable application.

DELIVERED CAPACITY VS. CURRENT

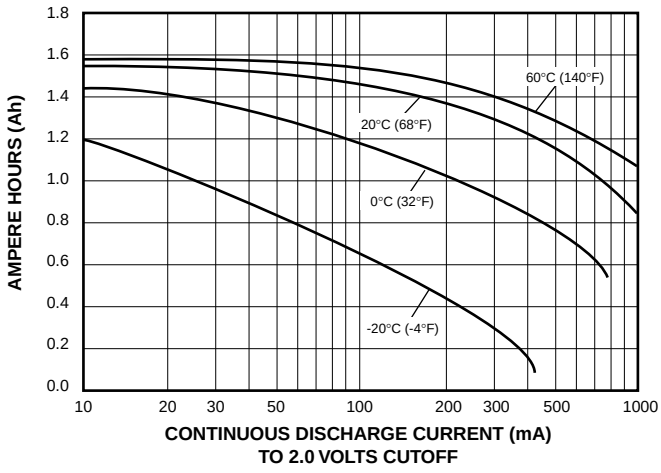

DELIVERED CAPACITY VS. LOAD

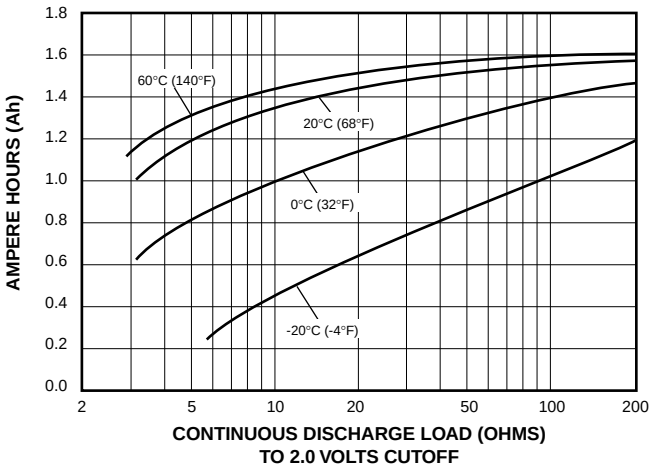


DURACELL INC.


New Products and Technology Division
Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-431-2656
Outside North America: 203-791-3274
Facsimile: 203-791-3273
Internet: www.duracellnpt.com

Printed in U.S.A. on recycled paper, please recycle after use.


CONTINUOUS DISCHARGE AT 60°C (140°F)

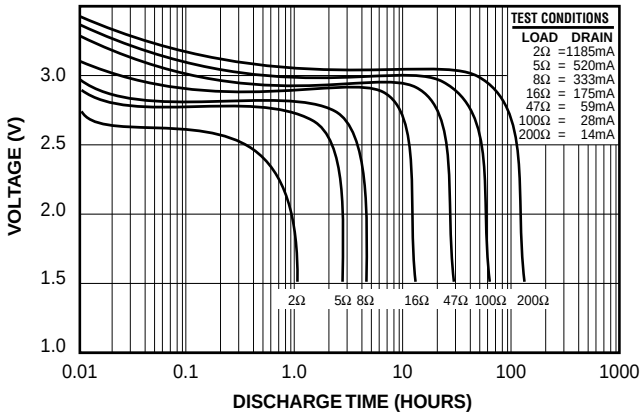


CONTINUOUS DISCHARGE AT 20°C (68°F)

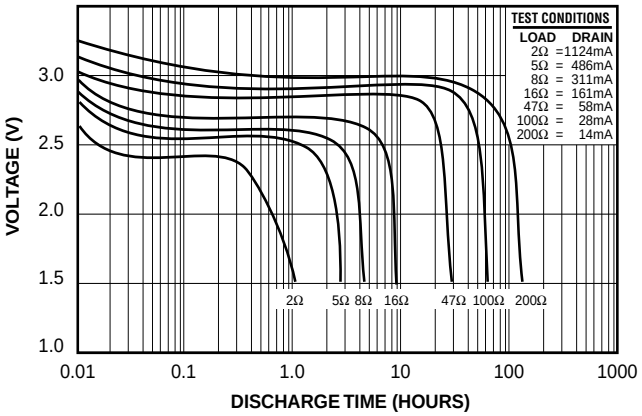


CONTINUOUS DISCHARGE AT 0°C (32°F)

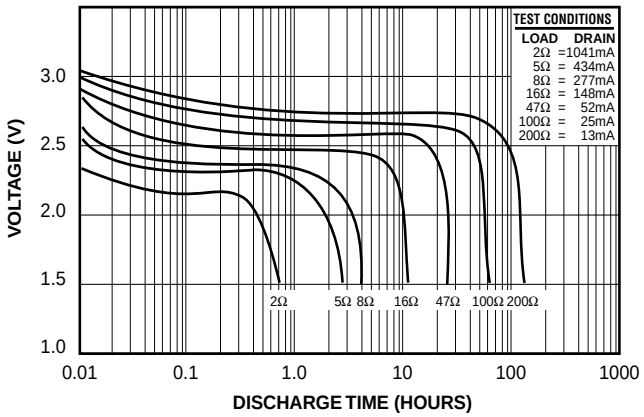

CONTINUOUS DISCHARGE AT -20°C (-4°F)

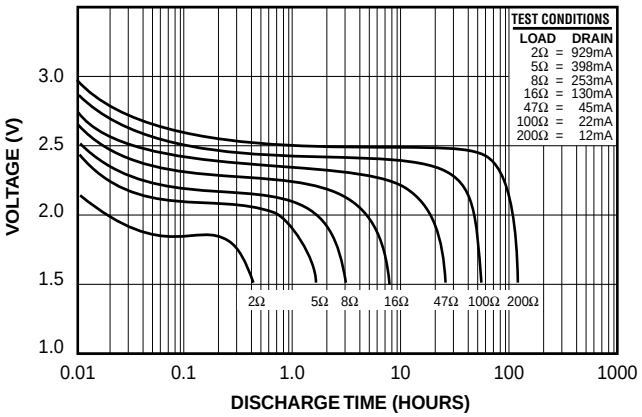

PULSE DISCHARGE AT DIFFERENT DUTY CYCLES 1.2A, AT 20°C (68°F)

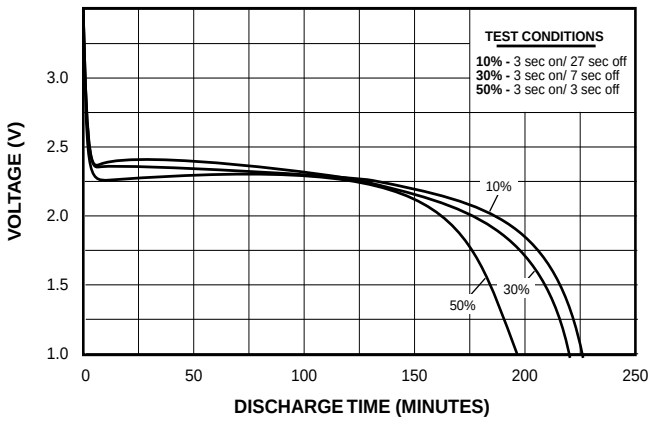

PULSE DISCHARGE AT DIFFERENT TEMPERATURES 1.2A, 3 SECONDS ON/7 SECONDS OFF

