
GP Batteries DATA SHEET


Model No.: GP11A

Description	: Alkaline High Voltage Battery
Nominal Voltage	: 6Volts
Nominal Dimensions	: Ø10.22mm×16.5mm
Terminal	: Nickel plated flat contacts - protruded red(+); recessed black (-)
Jacket	: Metal jacket
Internal Connection	: Pressure
Applications	: Remote controller
Average Weight	: 4.0g
Date Code	: Unless otherwise specified, each batteries will carry a numeric year code and analogue month code
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 22 ± 3 °C 40-80 %RH
Insulation Resistance	: 5MΩ min.
Close Circuit Voltage	: 4.7 Volts (min.)(load resistor 200Ω at 22 ± 3 °C for 0.1 to 2 seconds)
Current Drain	: Under 15mA pulse, 0.5mA continuous
Nominal Service Life (to 3.0V at 22 ± 3 ℃)	: 74hrs (at 10kΩ load)
Average Service Capacity (to 3.0V at 22 ± 3 ℃)	: 38mAh(at 10kΩ load)

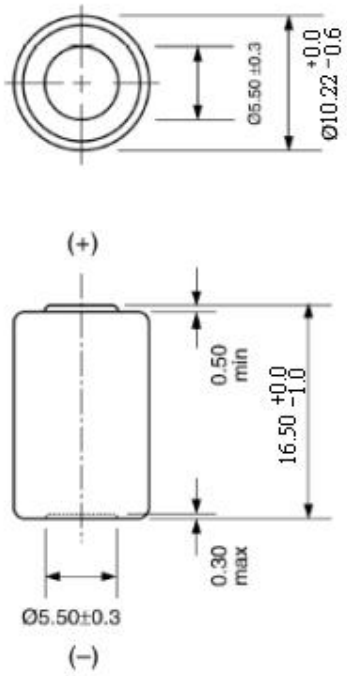

Unit : mm

Typical Discharge characteristics at 22 ± 3 ℃

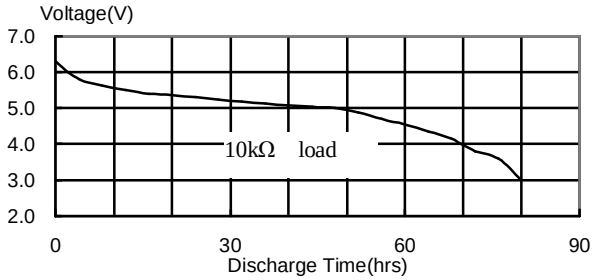

Cross References:

GP	Eveready	Duracell	Varta
11A	---	---	---

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright@GPI International Ltd. – All rights reserved

Member Gold Peak Group