DURACELL®
COPPERTOP®


MN1500

Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO_2




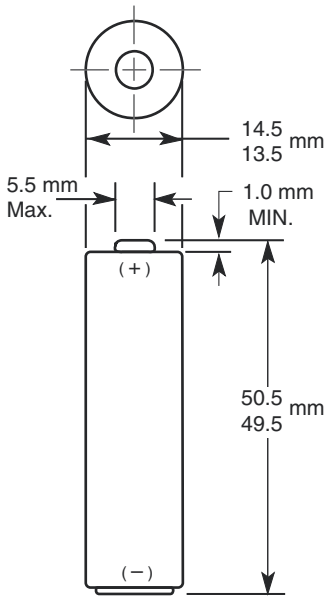

Dimensions shown are ANSI standards

Nominal Voltage:	1.5 V
Operating Voltage	1.6 - 0.75V
Impedance:	120 m-ohm @ 1kHz
Typical Weight:	24 gm (0.8 oz.)
Typical Volume:	8.4 cm^3 (0.5 $in.^3$)
Terminals:	Flat
Storage Temperature Range:	-20 ^oC to 35 ^oC
Operating Temperature Range:	-20 ^oC to 54 ^oC (-4 ^oF to 130 ^oF)
ANSI: **IEC:**	15A LR6

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

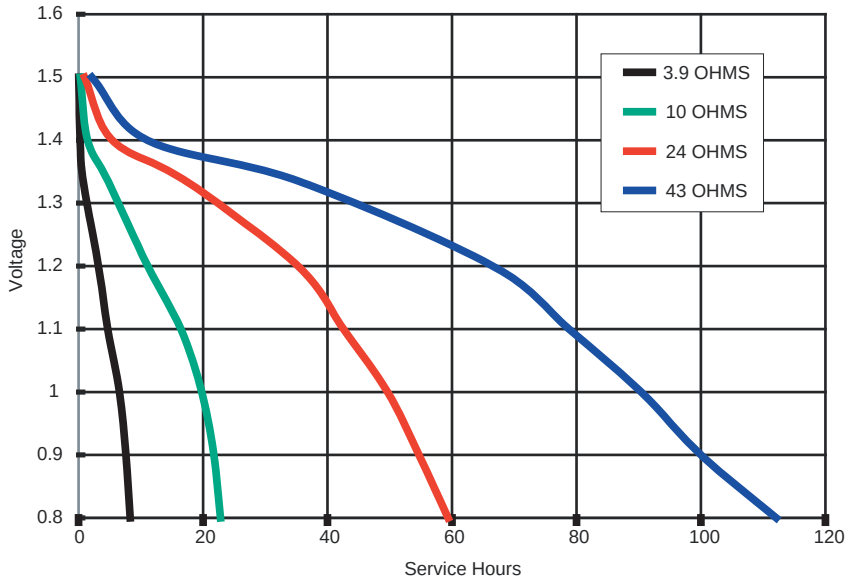

DURACELL® BATTERIES
Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* **Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.**

This data is subject to change. Performance information is typical. Contact Duracell for the latest information

DURACELL®
COPPERTOP®


MN1500

Size: AA (LR6)


Alkaline-Manganese Dioxide Battery

Zn/MnO_2


TYPICAL CONSTANT CURRENT DISCHARGE CHARACTERISTICS AT 21°C (70°F)

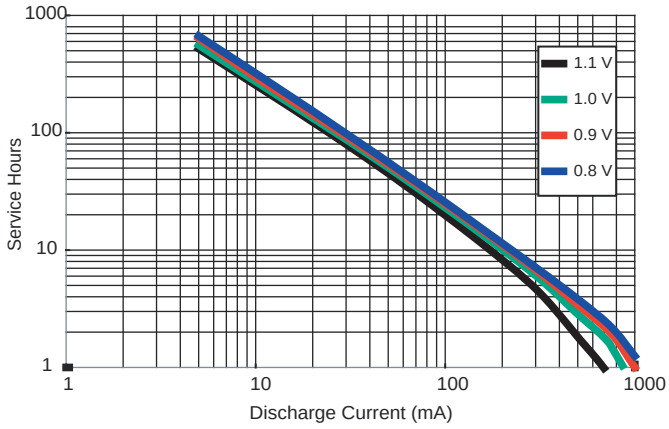


TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

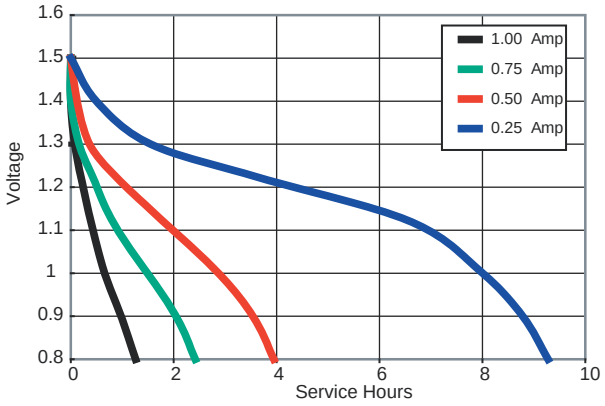


TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

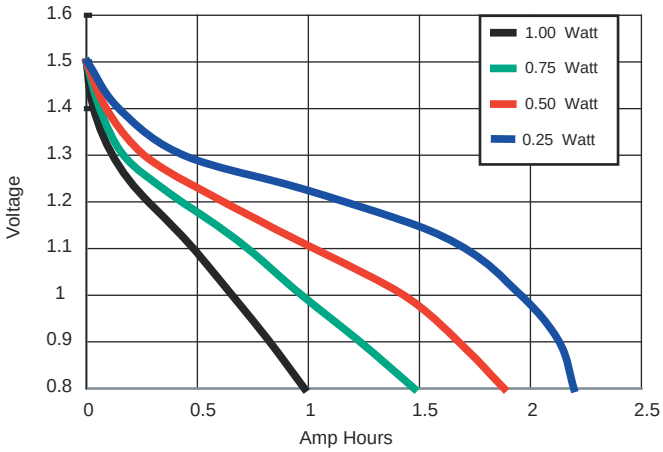

TYPICAL DISCHARGE PERFORMANCE AT 21°C (70°F)

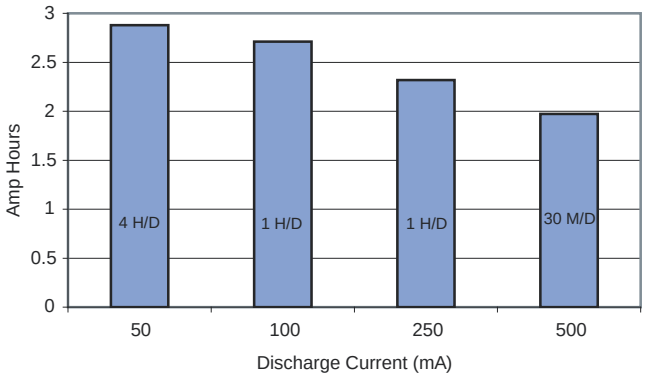

TYPICAL DC RESISTANCE CHARACTERISTICS AT 21°C (70°F)

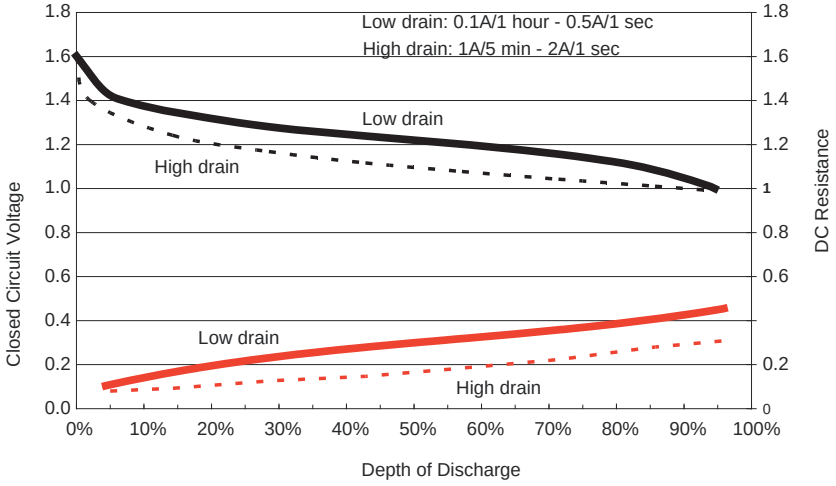

DURACELL® BATTERIES
Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* **Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.**

This data is subject to change. Performance information is typical. Contact Duracell for the latest information